


EXTRUTECH PLASTICS, INC.

"Custom Extruder of Close Tolerance Profiles"
 5902 West Custer Street - Manitowoc, WI 54220
 920.684.9650 Info@epiplastics.com / epiplastics.com

Rev. 9/23/24

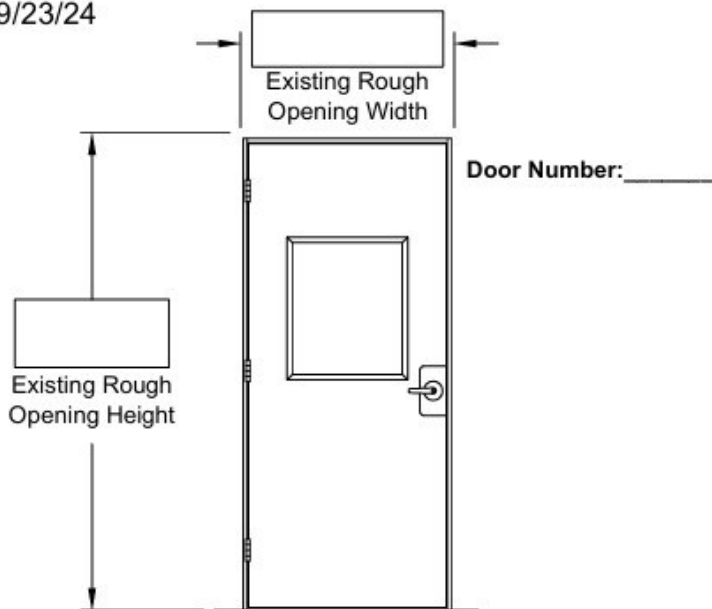

1. Door Location

For Interior Use Only!

2. Jamb Details

4 9/16" Jamb 6 9/16" Jamb
 Wall Thickness: _____

3. Standard Door Sizes

Size	Frame OD	Rough Opening
<input type="checkbox"/> 2868	34" x 82"	35" x 83"
<input type="checkbox"/> 3068	38" x 82"	39" x 83"
<input type="checkbox"/> 2870	34" x 86"	35" x 87"
<input type="checkbox"/> 3070	38" x 86"	39" x 87"

4. Window Options No Window

7" x 25" - Insulated / 1/4" Plexiglass
 16" x 16" - Insulated / 1/4" Plexiglass
 20" x 24" - Insulated / 1/4" Plexiglass
 22" x 30" - Insulated / 1/4" Plexiglass

5a. Panel Options

Select all that Apply

Insulated Door Panel
 Door Closer - (Reversible)
 12" SS Kick Plate - Push Side
 12" SS Kick Plate - Both Sides


5b. Frame Options

Brick Molding (Included)
 One Side(Included) Both Sides
Colonial Casing
 One Side Both Sides
3 1/2" Wide Foam Board
 One Side Both Sides
 Rough Opening Buck
 PVC Sill (Included) Aluminum Sill

5c. Hardware Options

Prep for Hardware (Bore Only)
Door Knob (Round - Not ADA Compliant)
 Non Locking (Passage)
 Locking - Keyed
 Locking - Privacy
Door Lever (ADA Compliant)
 Non Locking (Passage)
 Locking - Keyed
 Locking - Privacy
 Pull Handle W/ Push Plate
 Push Plate - Both Sides
 Comments: _____

6. Door Swing (Plan View)

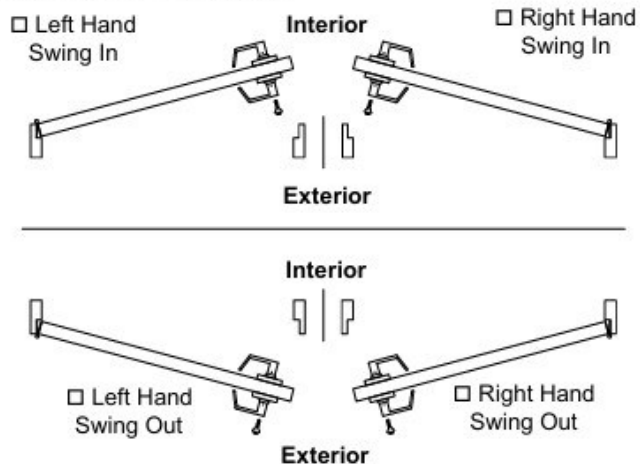

7. Customer Information Date: _____

Name: _____
 Company Name: _____
 Address: _____
 City: _____ State: _____ ZIP: _____
 Phone: _____ Cell: _____
 Email Address: _____

8. Project Information

Project Name: _____
 Address: _____
 City: _____ State: _____ ZIP: _____